

Installation instructions

Armrest center console

ND0-301519, ND0-301520, ND0-301521

I.L. MOTORSPORT

Open the flap of the center console, insert the stopper (photo 2) into the opening at the head of the storage compartment (photo 3/4) when the flap is half-open (photo 1). Press the stopper to the end position (photo 5)

Take the armrest and insert the hinge into the opening for the cup holders (photo 6). The rubber band (photo 7) on the underside of the armrest is placed above the snap-in pins. Than the rubber band than lies in the groove when it is close. Due to the stopper, the armrest remains in a vertical position after opening (photo 8).






Photo 1 Photo 2





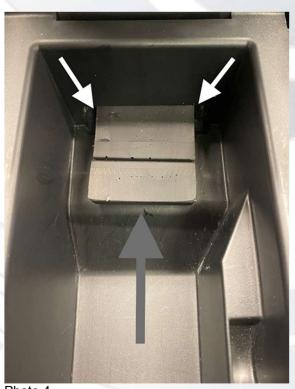


Photo 4

© Copyright I.L.Motorsport GmbH • Innungstr. 1 • 50354 Hürth-Gleuel • Tel.: 02233 977349

Created: 30.03.2023 / By: Marcus Janßen



Installation instructions

Armrest center console ND0-301519, ND0-301520, ND0-301521

I.L. MOTORSPORT



Photo 5



Photo 7





Photo 8

Created: 30.03.2023 / By: Marcus Janßen